



Straight Type

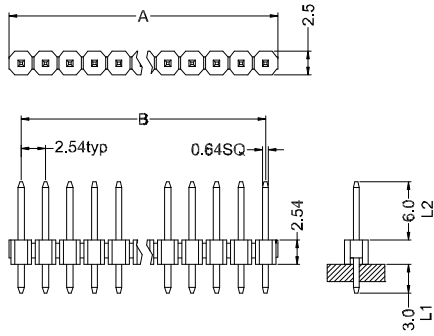


Right Angle Type





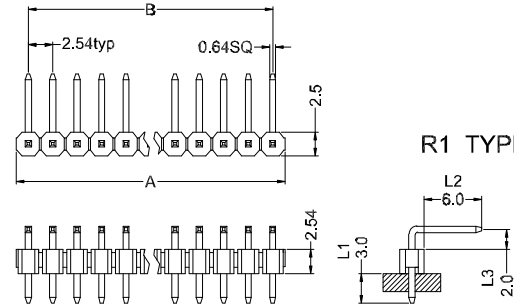


R1 TYPE

R2 TYPE

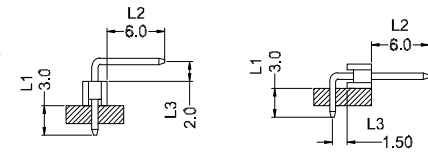

Surface Mount Type

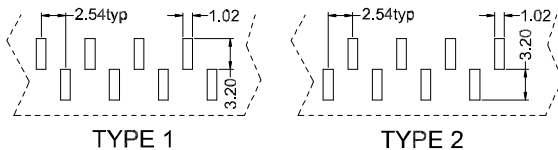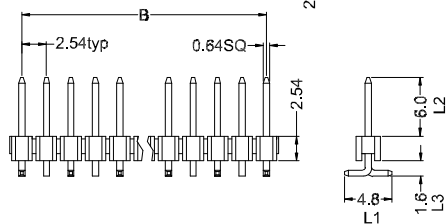

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black
 接触件 Contacts: Brass
 电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 2 AMP
 使用温度范围 Operating Temperature: -55°C~+105°C

Position	1 Thru 40
Dimension	
A±0.20	2.54 X No.of Positions
B±0.15	2.54 X No.of Positions -2.54

TITLE	PIN HEADER 2.54mm 2.54单排插针	GENERAL TOLERANCE	DRAWN BY	DATE	chizon CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)电子有限公司
SERIES	QC501-1	x. : ±0.3 x.x: ±0.2 x.xx: ±0.1	CHECKED BY	DATE	
CUSTOMER P/N		ANGLE TOLERANCE	張國校		DRAWING NO.
UNITS	mm	x. : ±2° x.x: ±1° x.xx: ±0.5°	APPROVED BY	DATE	SHEET
SCALE	1:1	PROJECTION			1 OF 1
DESCRIPTION					REV.
CHK					AO
DATE					